

13 February 2023

Voluntary Recall of Wild Country Superlight Rocks

To all owners and retailers of Wild Country Superlight Rocks Nos. 1-6, please immediately stop all use of Wild Country Superlight Rocks Nos. 1-6

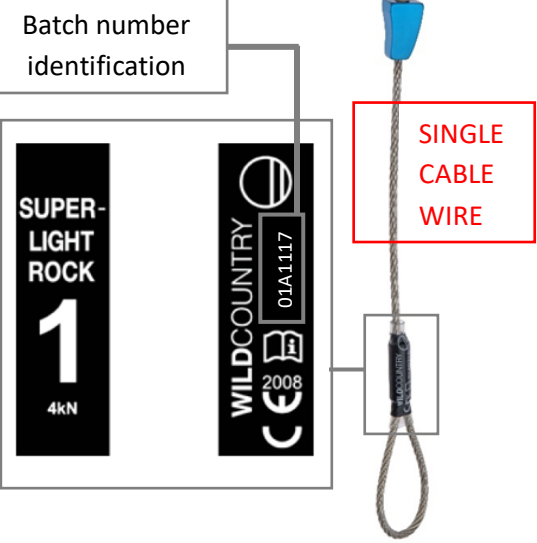
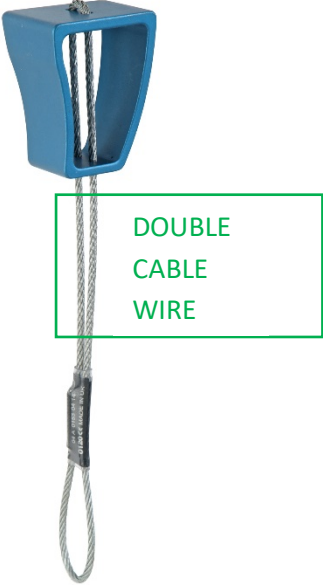
Name of Product: Wild Country Superlight Rocks Nos. 1-6 (code 40-RSL) and Superlight Rocks Set Nos. 1-6 (code 40-RSLSET) produced prior to January 2023.


SUPERLIGHT ROCK (code 40-RSL)					
Size 1	Size 2	Size 3	Size 4	Size 5	Size 6
Purple	Green	Silver	Gold	Blue	Red
					

Hazard: Wild Country has recently learned that when single cable Superlight Rocks are exposed to maritime seaside conditions with high concentrations of salt, and/or humid climate with salty atmosphere for an extended period of time, corrosion inside of the ferrule (the swage covered in plastic that is labelled with the name of the product) can occur. This can significantly reduce the breaking strength of the chocks and may therefore become dangerous for a climber in the event of a fall from height.

Remedy: Dealers and consumers should immediately stop using all Superlight Rocks Nos. 1-6 and contact Wild Country **for instructions to obtain a replacement.**

This recall does not apply to any other Wild Country Rocks, other than the Superlight Rocks Nos. 1-6 produced prior to January 2023. Wild Country Rocks, Classic Rocks, Rock Centrics, and Superlight Offset Rocks are not subject to this voluntary recall.

<p>Batch number identification</p>  <p>SINGLE CABLE WIRE</p>	 <p>DOUBLE CABLE WIRE</p>					
<p>SUPERLIGHT ROCK with a single cable wire.</p>	<p>Other Wild Country Rocks with double cable wire.</p>					
<p>SUBJECT TO RECALL</p>	<p>NOT SUBJECT TO RECALL</p>					
<p>SUPERLIGHT ROCK: 40-RSL, 40-RSLSET</p>	<p>ROCK: 40-RWA, 40-RWASET, ROCK CLASSIC: 40-RWSET, ROCK CENTRIC: 40-RCDA, 40-RCDA SET, SUPERLIGHT OFFSET ROCK: 40-OFFROCK, 40-OFFROCKSET</p>					
<p>Batch codes affected by the recall</p> <table border="1" data-bbox="326 1457 636 1803"> <tr><td>01A1117</td></tr> <tr><td>01A1217</td></tr> <tr><td>01A1219</td></tr> <tr><td>03A1219</td></tr> <tr><td>02A0221</td></tr> </table>	01A1117	01A1217	01A1219	03A1219	02A0221	
01A1117						
01A1217						
01A1219						
03A1219						
02A0221						

<p>Future production NOT SUBJECT TO RECALL</p>	
 <p>WILDCOUNTRY CE 2008 UKCA 8503 UIAA 06A0923</p> <p>UKCA 8503 06A0923</p> <p>NOT affected from the recall, if UKCA 8503 is present and the batch Nr. starts with 06</p>	

Consumer Contact: Wild Country is in the process of setting up the recall process system and expects to have the recall system up and running within one week. For updates and more information, please check the Wild Country website (<https://www.wildcountry.com/en-us/product-recalls>) or contact Wild Country toll-free by telephone at 1-844-412-7013 from 9:00 a.m. to 5:00 p.m., by email at SuperlightRockRecall@wildcountry.com".